


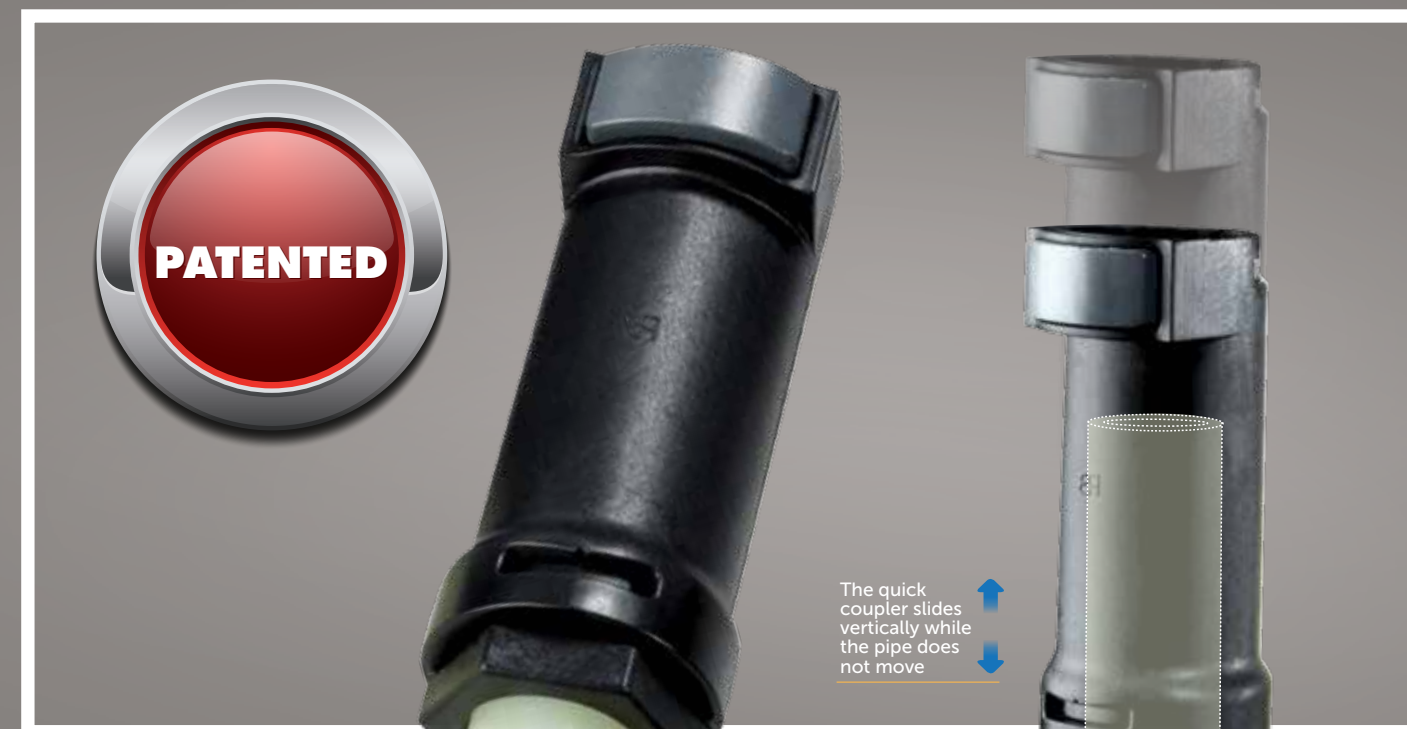

SLIDING BUTTON OPERATED QUICK COUPLERS AND ACCESSORIES

Connection

STEP nr.1

Cut the pipe with a cutter to a distance of 30 ± 2 mm from the manifold. Remove burrs from pipe.

STEP nr. 2

Push the pipe into the quick coupler up to the end of stroke.

End of stroke for PE-X/PER-T pipe

Ø 12 = 63 mm

Ø 14 = 63 mm

Ø 16 = 63 mm

Ø 17 = 63 mm

Ø 18 = 63 mm

Ø 20 = 63 mm

End of stroke for Multilayer pipe

Ø 16 = 52 mm

Ø 17 = 52 mm

Ø 20 = 52 mm

STEP nr. 3

Push the quick coupler up while it slides onto the pipe.




Release

Press the button and remove the quick coupler sliding on the pipe.



ACCESSORIES

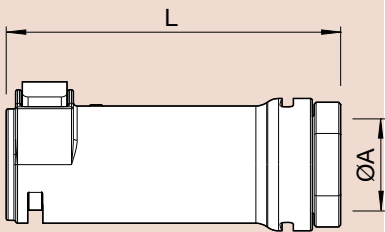

Sliding button operated quick coupler
To seal on outer diameter (pe-x)

P/N	ØA	L
RPLPUTERRB12A	12x2	85
RPLPUTERRB14	14x2	85
RPLPUTERRB16	16x2	88
RPLPUTERRB17	17x2	88
RPLPUTERRB18	18x2	88
RPLPUTERRB20	20x2	88
RPLPUTERRB25	25x2.5	88

To seal on inner diameter
(multilayer)

P/N	ØA	L
RPLPUTERRB16/M	16x2	88
RPLPUTERRB17/M	17x2	88
RPLPUTERRB20/M	20x2	88
RPLPUTERRB2025M	20x2.5	88

Button operated quick coupler
c/w Y push-in connector

P/N	ØA	L	L1
IPLPUTERRBY08	8x1	52	44
RPLPUTERRBY10.3	10.3x1.5	58	47
RPLPUTERRBY12	12x2	58	47

Please contact our technical-sales department for all your needs.



M3/4"
Euroconus adapter

P/N		A	L
58TECM3/4	Materiale ottone	3/4"	33
RTECM3/4	Materiale: PA6.6 FV30%	3/4"	33


F3/4"
Euroconus adapter

P/N	B	ØA
NTEC-F3/4-16	3/4"	16
NTEC-F3/4-17	3/4"	17
NTEC-F3/4-18	3/4"	18
NTEC-F3/4-20	3/4"	20

Material: PVDF

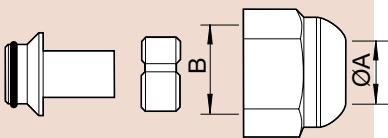


Please contact our technical-sales department for all your needs.




SLIDING BUTTON OPERATED QUICK COUPLERS AND ACCESSORIES


Blanked off coupler		
P/N	L	
RPLPUTER-T	33	



Automatic air bleed valve		
P/N	A	
RTE-SA	3/8"	




Manual air bleed valve		
P/N	A	
NVS620-1/2	1/2"	
NVS620-3/8	3/8"	




Temperature gauge		
P/N	SCALE	
RTE-TER	0 - 80 °C	

Bent support Ø 16		
P/N	Ø PIPE	
VTE16-18/001	16	




Template for button operated quick couplers For pe-x pipe		
P/N		
RDIMA20181716PC		

For multilayer pipe		
P/N		
RDIMA20181716MC		

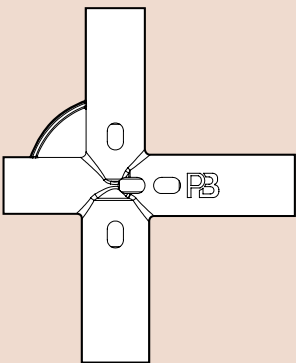

Template for right pipe length to manifold		
P/N		
GDIMA-TE		



Please contact our technical-sales department for all your needs.

Please contact our technical-sales department for all your needs.